
Herringbone & Chevron Acoustic Panels



Specifications

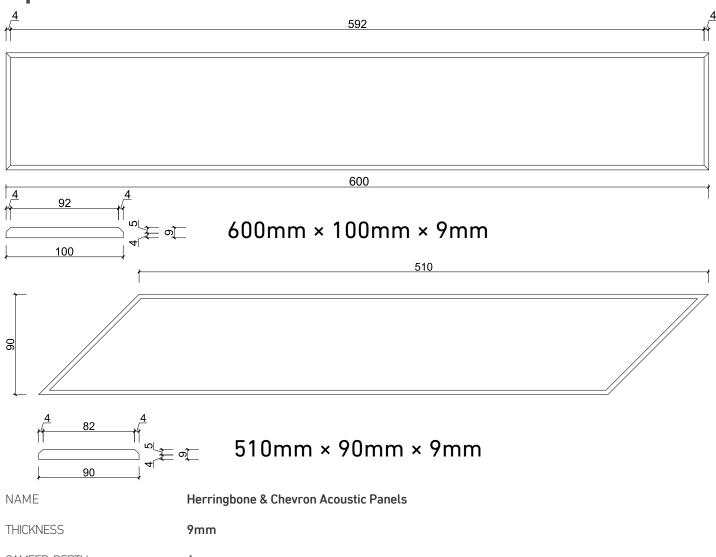

CAMFER DEPTH 4mm


9mm 1800GSM **DENSITY**

COMPOSITION 100% Polyester Fiber, 100% Recyclable


Assemble

ASSEMBLE

Herringbone



Chevron

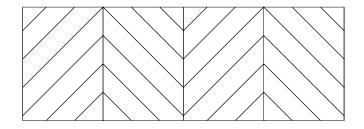

For additional specifications and performance details please visit www.trioakwood.com


Herringbone & Chevron Acoustic Panels



COLOR - PET Fire Retardant acoustic panel







FG001 Light Camel

FG004 Grey Marble

FG022 Moonlight Grey

Chevron



Herringbone



FG004 Grey Marble